## UNLOCK THE WORLD AROUND YOU





MODEL: COMMAND COM

SKU: PSL-CC20


SMART HANDLE SPEC SHEET

## **PRODUCT SPECIFICATIONS**

| Mechanical Features                   |                                                                |
|---------------------------------------|----------------------------------------------------------------|
| Description                           | Electronic touchpad handleset with built-in bluetooth unlock   |
| Handing                               | Field handed                                                   |
| Materials                             | Zinc-alloy                                                     |
| Colors                                | Silver, Black                                                  |
| Door Thickness                        | From 1-3/8" to 2-1/2" (35mm to 63mm)                           |
| Locking Options                       | ANSI/BHMA Grade 2 with 5/8" Latch                              |
| Batteries                             | (4) AA for up to 2 years.                                      |
| Key Override                          | Physical keyhole with master key                               |
| Online Configuration                  | Fully programmable from the Geokey Portal                      |
| Panel Dimensions (mm)                 | 160 x 70 x 22.5                                                |
| Lock Operation                        |                                                                |
| Electronic Key Levels                 | Multiple roles through Geokey Portal                           |
| Programming & Audit Trail Downloading | Programming and unlimited records available on Geokey Portal   |
| Keys accepted                         | Unlimited mobile access Geokeys and (2) physical override keys |
| Unlock Method                         | Bluetooth and PIN codes (permanent, one time, and custom)      |
| Remote Unlock Capability              | Compatible with our G2 and G3 hubs                             |
| Certifications and Testing            |                                                                |
| Certification                         | BHMA A156.25, BHMA A156.36                                     |
| Fire Rating                           | Meets UL 10B/C and ULC S-104 up to and including 1.5 hours     |
| Environmental Operating Conditions    | -4°F to +158°F (-20°C to +70°C), 10% to 95% relative humidity  |
| IP Rating                             | IP55                                                           |
| Warranty                              |                                                                |
| Standard Warranty                     | One year                                                       |



1 (888) 348-9905 support@geokeyaccess.com www.geokeyaccess.com

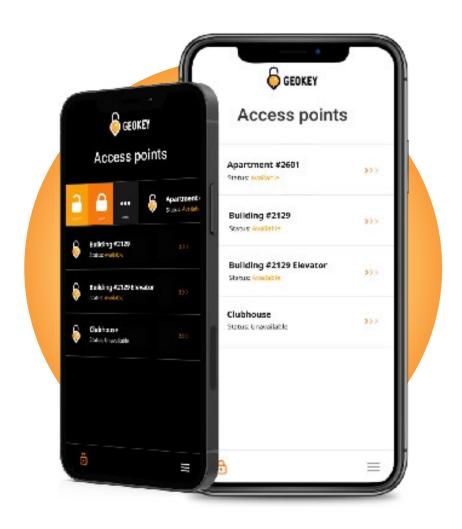

THE WORLD'S FIRST
MULTI-DIMENSIONAL
MOBILE ACCESS SOLUTION